

ICM 1000 Methyltrimethoxy Silane

Description

This additive is a silane that can readily react with a wide range of surfaces including organic polymers, glass, and ceramics.

Key Features

- Effective coupling agent
- Increases tensile, compression and modulus strength to composites
- Improves adhesion
- Effective at low concentrations and has great compatibility with organic polymers and inorganic fillers.

Key Applications

- Clay reinforced elastomers
- Adhesion promoter
- Nitrile rubber
- Abrasive composites

Application

ICM 1000 is composed of methyltrimethoxy silane. ICM 1000 is used in formulation in order to improve adhesion and strength to a variety of substrates.

Property

Product

Appearance

Color

Density

Specific Gravity A

Viscosity (cst)

Storage

Max Storage Temperature

Packaging

Shelf Life

Test Method

BS ISO 2781

Value

Clear liquid

Clear

1.037 g/cm³

1.037

5


40 °C / 104 °F

40 lbs Pails or 441 lbs

Drums

24 mths

Structure of methyltrimethoxy silane

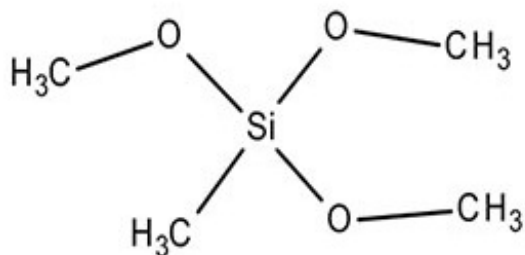

Use and Cure Information

This product is generally added to compositions at less than 1% in most formulations. Our product can be applied to surfaces as a dilute aqueous solution. It can also be mixed with water using light agitation.

Health & Safety

Read product and safety data sheets before handling this product for physical and health hazard information. The safety data sheet is available from your CHT representative.

Revision Date 31 Aug 2021

Revision No 11

Download Date 03 Jul 2024

The content set out in the technical data sheet does not contain information upon which you should rely. It is provided for general information purposes only and does not constitute a product specification. You must obtain professional or specialist advice before taking any action based on the information provided in the technical data sheet.

CHT make reasonable efforts to ensure that information set out in the technical data sheet is complete, accurate, and up-to-date. CHT do not, however, make any representations, warranties or guarantees (whether express or implied) that information set out in the technical data sheet is complete, accurate, or up-to-date or that the product will be suitable for your requirements. You should carry out your own testing to determine the applicability of such information and whether the product will be suitable. CHT reserve the right to modify the technical data sheet at any time. The CHT technical service department is available to offer further information and advice and should it be needed to look at modifying current products or custom formulate a new one to meet your specific requirements. Please contact the technical service department.

CHT Germany GmbH: Postfach 12 80, 72002 Tübingen, Bismarckstraße 102, 72072 Tübingen, Germany
Telephone: 07071/154-0, Fax: 07071/154-290, Email: info@cht.com, Homepage: www.cht.com / www.cht-silicones.com